






Profilo R

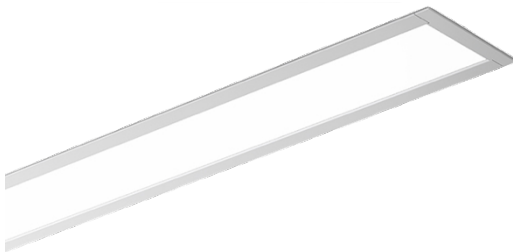

Profilo R recessed LED Linear systems offers continuous runs of dot-free illumination with 100% lit diffuser and bends without dark spots, magnetic end caps without screws, futureproof LED boards easy to replace or upgrade, standard bends are T, X, L shapes and custom bends available upon request, high-impact acrylic anti yellowing diffuser provides smooth uniform illumination, suitable for recessed mounting into ceilings and walls, supplied with remote driver, incremental length 50mm, available with any length for continuous runs.

Material- Extruded aluminium channel with high-impact acrylic diffuser.

Finish- Silver anodized paint finish, black, white or any custom RAL colour.


Efficacy- 97lm/W

Input voltage- 240V 50/60Hz

Dimming- 1-10V, DALI or DSI.

Life: 50,000 Hours L70

Warranty: 3 years

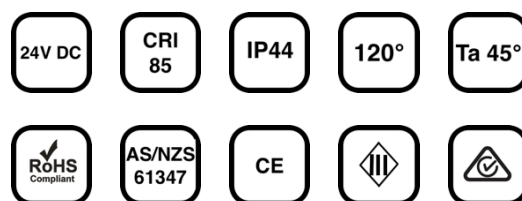



Model number	Profile	Wattage	Mount	CCT	Finish	Controls
PRR-26-13W-RC-4K-AL-S	26	8W/M	RC: Recessed ceiling	2700K	AL	S: Standard
		13W/M	RW: Recessed wall	3000K	BK	D: DALI
				4000K	WH	A: 0-10V
PRR-54-20W-RC-4K-AL-S	54 69 94	20W/M	RC: Recessed ceiling	2700K	AL	S: Standard
		25W/M	RW: Recessed wall	3000K	BK	D: DALI
		30W/M		4000K	WH	A: 0-10V

